


## 7 Crossguide Directional Coupler



Vector Telecom manufactures Crossguide Directional Couplers covering a wide frequency range. Couplers are available in 3 or 4 port configuration. Standard coupling values are 20, 30, 40, 50 and 60 dB, with minimum Directivity of 18 dB. The compactness of crossguide coupler suits many applications where space is at a premium and directivity is not the prime consideration. Models are available with combinations of waveguide and coaxial ports. Special multi-port crossguide couplers can be manufactured to suit customer's special requirements.

### Style 1 — 4 Waveguide Ports

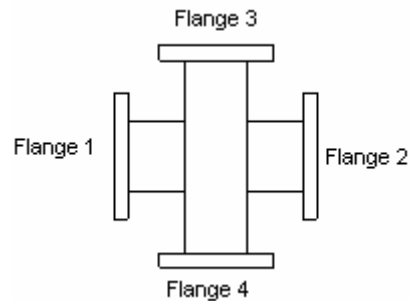

### 【Specifications】

Model No*	Freq Range (GHz)	Operating Bandwidth (%)**	VSWR (Max)		Coupling*** (dB)	Directivity (Min) (dB)	WG Type		Flange	Material
			Main Line	Secondary Line			IEC	EIA		
VT22W+C...	1.72-2.61	10-20	1.10	1.15	18-60	18	R22	WR430	FDP/FDM	Al/Cu
VT26W+C...	2.17-3.30	10-20	1.10	1.15	18-60	18	R26	WR340	FDP/FDM	Al/Cu
VT32W+C...	2.60-3.95	10-20	1.10	1.15	18-60	18	R32	WR284	FDP/FDM	Al/Cu
VT40W+C...	3.22-4.90	10-20	1.10	1.15	18-60	18	R40	WR229	FDP/FDM	Al/Cu
VT48W+C...	3.94-5.99	10-20	1.10	1.15	18-60	18	R48	WR187	FDP/FDM	Al/Cu
VT58W+C...	4.64-7.05	10-20	1.10	1.15	18-60	18	R58	WR159	FDP/FDM	Al/Cu
VT70W+C...	5.38-8.17	10-20	1.10	1.15	18-60	18	R70	WR137	FDP/FDM	Al/Cu
VT84W+C...	6.57-9.99	10-20	1.10	1.15	18-60	18	R84	WR112	FBP/FBM/FBE	Al/Cu
VT100W+C...	8.20-12.40	10-20	1.10	1.15	18-60	18	R100	WR90	FBP/FBM/FBE	Al/Cu
VT120W+C...	9.84-15.0	10-20	1.10	1.15	18-60	18	R120	WR75	FBP/FBM/FBE	Al/Cu
VT140W+C...	11.9-18.0	10-20	1.10	1.15	18-60	18	R140	WR62	FBP/FBM/FBE	Al/Cu
VT180W+C...	14.5-22.0	10-20	1.10	1.15	18-60	18	R180	WR51	FBP/FBM/FBE	Al/Cu
VT220W+C...	17.6-26.7	10-20	1.10	1.15	18-60	18	R220	WR42	FBP/FBM/FBE	Al/Cu
VT260W+C...	21.7-33.0	10-20	1.10	1.15	18-60	18	R260	WR34	FBP/FBM/FBE	Al/Cu
VT320W+C...	26.3-40.0	10-20	1.15	1.15	18-60	18	R320	WR28	FBP/FBM/FBE	Al/Cu



### Crossguide Directional Coupler



Vector Telecom Pty Ltd

Website: [www.vectortele.com](http://www.vectortele.com)

Email: [sales@vectortele.com](mailto:sales@vectortele.com)

\*Indicates Model Number. See Ordering Information for complete part number.  
 \*\*Typical operating bandwidth of the crossguide coupler is up to 20% of waveguide bandwidth.  
 \*\*\*Nominal Accuracy:  $\pm 0.7\text{dB}$   
 Frequency Sensitivity:  $\pm 1\text{dB}$

### 【Ordering Information】

**Example Part No:** VT 100 W+C 30 P M E M A


Vector Telecom ————  
 WG Type: R100 ————  
 Product Type: Crossguide Directional Coupler (4 WG Ports)  
 Coupling: C=30dB ————

Material: A = Aluminum, C=Copper  
 Flange 4 Type: FBM100  
 Flange 3 Type: FBE100  
 Flange 2 Type: FBM100  
 Flange 1 Type: FBP100

- Flange type: Multiple types available - see VT Flanges page
- Finish: Corrosion protection plus black top coat

Section 1  
**Waveguide Components**

### Style 2 — 3 Waveguide Ports

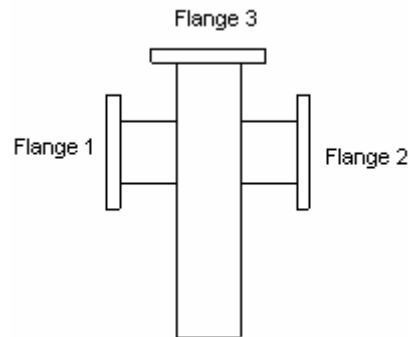

### 【Specifications】

Model No*	Freq Range (GHz)	Operating Bandwidth (%)**	VSWR (Max)		Coupling*** (dB)	Directivity (Min) (dB)	WG Type		Flange	Material
			Main Line	Secondary Line			IEC	EIA		
VT22WL+C...	1.72-2.61	10-20	1.10	1.15	18-60	18	R22	WR430	FDP/FDM	Al/Cu
VT26WL+C...	2.17-3.30	10-20	1.10	1.15	18-60	18	R26	WR340	FDP/FDM	Al/Cu
VT32WL+C...	2.60-3.95	10-20	1.10	1.15	18-60	18	R32	WR284	FDP/FDM	Al/Cu
VT40WL+C...	3.22-4.90	10-20	1.10	1.15	18-60	18	R40	WR229	FDP/FDM	Al/Cu
VT48WL+C...	3.94-5.99	10-20	1.10	1.15	18-60	18	R48	WR187	FDP/FDM	Al/Cu
VT58WL+C...	4.64-7.05	10-20	1.10	1.15	18-60	18	R58	WR159	FDP/FDM	Al/Cu
VT70WL+C...	5.38-8.17	10-20	1.10	1.15	18-60	18	R70	WR137	FDP/FDM	Al/Cu
VT84WL+C...	6.57-9.99	10-20	1.10	1.15	18-60	18	R84	WR112	FBP/FBM/FBE	Al/Cu
VT100WL+C...	8.20-12.40	10-20	1.10	1.15	18-60	18	R100	WR90	FBP/FBM/FBE	Al/Cu
VT120WL+C...	9.84-15.0	10-20	1.10	1.15	18-60	18	R120	WR75	FBP/FBM/FBE	Al/Cu
VT140WL+C...	11.9-18.0	10-20	1.10	1.15	18-60	18	R140	WR62	FBP/FBM/FBE	Al/Cu
VT180WL+C...	14.5-22.0	10-20	1.10	1.15	18-60	18	R180	WR51	FBP/FBM/FBE	Al/Cu
VT220WL+C...	17.6-26.7	10-20	1.10	1.15	18-60	18	R220	WR42	FBP/FBM/FBE	Al/Cu
VT260WL+C...	21.7-33.0	10-20	1.10	1.15	18-60	18	R260	WR34	FBP/FBM/FBE	Al/Cu
VT320WL+C...	26.3-40.0	10-20	1.15	1.15	18-60	18	R320	WR28	FBP/FBM/FBE	Al/Cu



## Crossguide Directional Coupler



Vector Telecom Pty Ltd

Website: [www.vectortele.com](http://www.vectortele.com)  
 Email: [sales@vectortele.com](mailto:sales@vectortele.com)


\*Indicates Model Number. See Ordering Information for complete part number.

\*\*Typical operating bandwidth of the crossguide coupler is up to 20% of waveguide bandwidth.

\*\*\*Nominal Accuracy:  $\pm 0.7\text{dB}$


Frequency Sensitivity:  $\pm 1\text{dB}$

**【Ordering Information】**

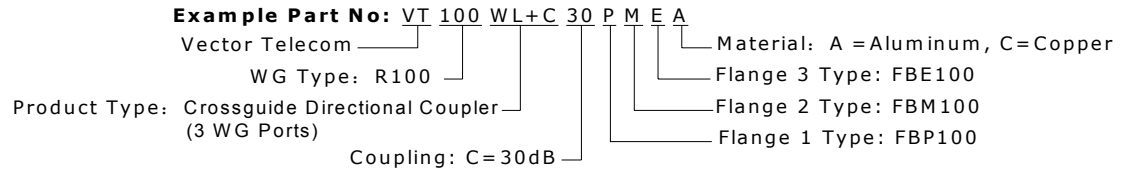

- Flange type: Multiple types available - see VT Flanges page
- Finish: Corrosion protection plus black top coat

**Style 3 — 2 Waveguide Ports, 1 Coax Port**

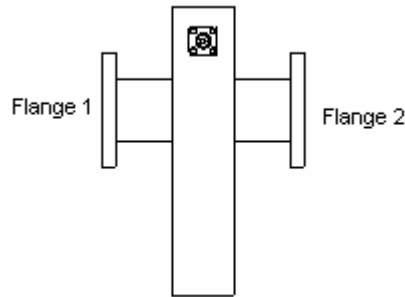

**【Specifications】**

Model No*	Freq Range (GHz)	Operating Bandwidth (%)**	VSWR (Max)		Coupling*** (dB)	Directivity (Min) (dB)	WG Type		Flange	Coax Connector	Material
			Main Line	Secondary Line			IEC	EIA			
VT22WL+C...	1.72-2.61	10-20	1.10	1.25	18-60	18	R22	WR430	FDP/FDM	N	Al/Cu
VT26WL+C...	2.17-3.30	10-20	1.10	1.25	18-60	18	R26	WR340	FDP/FDM	N	Al/Cu
VT32WL+C...	2.60-3.95	10-20	1.10	1.25	18-60	18	R32	WR284	FDP/FDM	N	Al/Cu
VT40WL+C...	3.22-4.90	10-20	1.10	1.25	18-60	18	R40	WR229	FDP/FDM	N	Al/Cu
VT48WL+C...	3.94-5.99	10-20	1.10	1.25	18-60	18	R48	WR187	FDP/FDM	N	Al/Cu
VT58WL+C...	4.64-7.05	10-20	1.10	1.25	18-60	18	R58	WR159	FDP/FDM	N	Al/Cu
VT70WL+C...	5.38-8.17	10-20	1.10	1.25	18-60	18	R70	WR137	FDP/FDM	N	Al/Cu
VT84WL+C...	6.57-9.99	10-20	1.10	1.25	18-60	18	R84	WR112	FDP/FDM	N	Al/Cu
VT100WL+C...	8.20-12.4	10-20	1.10	1.25	18-60	18	R100	WR90	FDP/FDM	N	Al/Cu
VT120WL+C...	9.84-15.0	10-20	1.10	1.25	18-60	18	R120	WR75	FDP/FDM	SMA	Al/Cu
VT140WL+C...	11.9-18.0	10-20	1.10	1.25	18-60	18	R140	WR62	FDP/FDM	SMA	Al/Cu
VT180WL+C...	14.5-22.0	10-20	1.10	1.30	18-60	18	R180	WR51	FDP/FDM	SMA	Al/Cu
VT220WL+C...	17.6-26.7	10-20	1.10	1.50	18-60	18	R220	WR42	FDP/FDM	SMA, K	Al/Cu
VT320WL+C...	26.3-40.0	10-20	1.15	1.50	18-60	18	R320	WR28	FDP/FDM	SMA, K	Al/Cu



**Crossguide Directional Coupler**



Vector Telecom Pty Ltd

Website: [www.vectortele.com](http://www.vectortele.com)


Email: [sales@vectortele.com](mailto:sales@vectortele.com)



Section 1  
**Waveguide  
Components**

\*Indicates Model Number. See Ordering Information for complete part number.  
\*\*Typical operating bandwidth of the crossguide coupler is up to 20% of waveguide bandwidth.  
\*\*\*Nominal Accuracy:  $\pm 0.7\text{dB}$   
Frequency Sensitivity:  $\pm 1\text{dB}$

**【Ordering Information】**

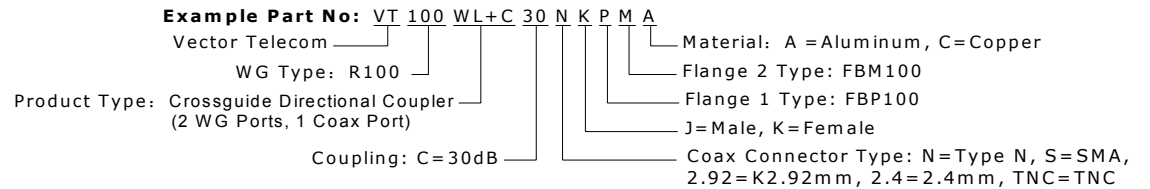

- Flange type: Multiple types available - see VT Flanges page
- Finish: Corrosion protection plus black top coat



**Crossguide  
Directional  
Coupler**



**Vector Telecom Pty Ltd**

Website: [www.vectortele.com](http://www.vectortele.com)  
Email: [sales@vectortele.com](mailto:sales@vectortele.com)