



VT2527VOA16F


Omni-Directional Antenna

Description


Vector Telecom manufactures a high quality line of Omni Directional Antennas typically used in MMDS transmitting systems.

Specifications

MODEL NO	VT2527VOA16F
FREQ RANGE (GHz)	2.5-2.7
VSWR Max	1.5
GAIN (dB) Min	13
POLARIZATION	Vertical
BEAMWIDTH (Azimuth) (°)	360
BEAMWIDTH (Elevation) (°)	4
POWER HANDLING (W)	300 (CW)
CONNECTOR	N-F
INPUT IMPEDANCE (Ω)	50
SIZED*H (mm)	170*1600
OPERATION TEMP (°C)	-40~+70

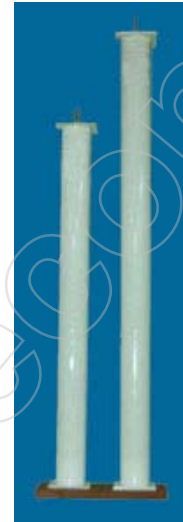

Outline Drawings

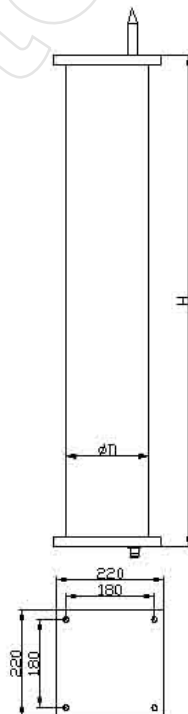

Revision History

Date	Revision	Changes
18-Mar-2008	1	First release

Vector Telecom

Information furnished is believed to be accurate and reliable. However, Vector Telecom assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Vector Telecom. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. Vector Telecom products are not authorized for use as critical components in life support devices or systems without express written approval of Vector Telecom.

The Vector Telecom logo is a registered trademark of Vector Telecom Pty Ltd.

© 2008 Vector Telecom Pty Ltd - All rights reserved

Email: sales@vectortele.com

www.vectortele.com